

Ironsand Hip — Tutukaka

Capability statement & quote

— 01 —

A ROOFING PROPOSAL — PREPARED FOR

Smith Residence

14 Pataua South Rd, Whangarei

Roof Replacement — Smith Residence, Pataua South

REFERENCE

FR-2026-051

PREPARED

22 May 2026

VALID

30 days

About FLOOD ROOFING

Flood Roofing is a Northland-based roofing specialist established in 2016. Owner Aron Flood has 15+ years on the tools — from high-end architectural homes through to large commercial re-roofs — and only hires the best team along the way. We install premium NZ-made Colorsteel® Maxam and Endura products only, and back every roof with a written 10-year workmanship warranty.

"We treat every roof like it's our own home — premium materials, no shortcuts, and we stand behind the work for a decade."

— FLOOD ROOFING

— 01

Premium NZ materials
Colorsteel® Maxam, Endura
and top-tier NZ Steel products
only.

— 02

15+ years on the tools
Every job supervised on-site
by an experienced lead roofer.

— 03

10-yr workmanship
Written warranty on every roof,
in addition to manufacturer
cover.

— 04

LBP & insured
Licensed Building Practitioner.
PL + contract works covered.

THE TEAM

Who'll be on your roof

01.

Owner / Project Lead
Aron Flood
Quoting, site supervision, sign-off

02.

Lead Roofer
Sam Whittaker
On-site lead, installation, QC

03.

Roofers (×2)
Jase + Mason
Strip-out + install crew

04.

Apprentice
Tane Mahuta
Materials handling, supervised
work

Existing roof condition

The existing roof is original ~1995 Colorsteel corrugate showing significant paint film failure on the north and west faces, with rust beginning at fixing points. Ridge cap is flat-bar fixed (now superseded) and has lifted in three places on the western run. Spouting on the south elevation is sagging and undersized for the catchment. We recommend a full strip-and-replace rather than overcoat — the underlying steel has begun to perforate in isolated areas.

OBSERVATIONS

- 01

Paint film failure 60-70% on north + west faces (chalk + flake)
- 02

Surface rust at all fixing points, perforation starting at 4 fixings
- 03

Ridge cap lifted in 3 locations — flat-bar fixings outdated
- 04

Underlay has degraded (visible from inside ceiling space)
- 05

6m of south-elevation spouting sagging; downpipe undersized
- 06

No identified asbestos products in the existing roof structure

SITE DOCUMENTATION

Site overview

Site overview

Existing ridge cap

Existing ridge cap — flat-bar fixings

— photo —

UPLOAD SITE PHOTO HERE

— photo —

UPLOAD SITE PHOTO HERE

— photo —

UPLOAD SITE PHOTO HERE

— photo —

UPLOAD SITE PHOTO HERE

Quote inclusions & pricing

A.

OPTION A

Standard Re-Roof — Colorsteel® Endura

Strip and replace using NZ Steel's standard Endura corrugate — proven NZ-made pre-painted steel with a 15-year manufacturer's warranty.

INCL. GST

\$20,297.50

Sub \$17,650.00 · GST \$2,647.50

INCLUDED IN THE WORK		ITEMISED PRICING			
		DESCRIPTION	QTY	UNIT	TOTAL
01	Strip existing roof + safe disposal				
02	Install Endura corrugated sheet (0.55mm)	Endura corrugate sheet (0.55mm)	78	\$78.50	\$6,123.00
03	New ridge, apron, and barge flashings	Ridge & apron flashings — Endura	32	\$36.00	\$1,152.00
04	Re-flash 1× chimney + 2× pipe penetrations	Underlay + barge fixings	1	\$1,240.00	\$1,240.00
05	Underlay (foil + breathable)	Penetrations + chimney flashing kit	3	\$285.00	\$855.00
06	Site clean-up + magnet sweep	Labour — strip, install, sign-off	1	\$7,800.00	\$7,800.00
		Skip hire + disposal	1	\$480.00	\$480.00
		Total incl. GST			\$20,297.50

OPTIONAL UPGRADES

Upgrade to 0.55mm Heavy-duty fixings

Stainless tek screws + EPDM washers throughout. Recommended on coastal sites.

+\$437.00

B.

OPTION B

Premium Maxam Re-Roof — coastal-grade

Upgraded to Colorsteel® Maxam — thicker zinc-aluminium coating and a tougher paint film, engineered for Severe Marine zones. Best long-term value within 100m of the surf.

INCL. GST

\$23,362.48

Sub \$20,315.20 · GST \$3,047.28

INCLUDED IN THE WORK

01	Strip existing roof + safe disposal
02	Install Maxam corrugated sheet (0.55mm)
03	Stainless screws + EPDM washers
04	Maxam ridge, apron, barge & gutter flashings
05	Re-flash 1× chimney + 2× pipe penetrations
06	Premium foil + breathable underlay
07	Annual wash-down reminder service

ITEMISED PRICING

DESCRIPTION	QTY	UNIT	TOTAL
Maxam corrugate sheet (0.55mm)	78	\$92.40	\$7,207.20
Maxam ridge & apron flashings	32	\$44.00	\$1,408.00
Stainless tek screws + EPDM washers	1	\$620.00	\$620.00
Underlay + barge fixings	1	\$1,240.00	\$1,240.00
Penetrations + chimney flashing kit	3	\$320.00	\$960.00
Labour — strip, install, sign-off	1	\$8,400.00	\$8,400.00
Skip hire + disposal	1	\$480.00	\$480.00
Total incl. GST			\$23,362.48

OPTIONAL UPGRADES

Re-line existing spouting in Maxam

Replace 6m of south-elevation spouting in matching Maxam colour.

+\$814.20

Colorsteel® MAXAM with Activate™

Colorsteel® is NZ Steel's pre-painted roofing and cladding range — rolled and painted at Glenbrook from New Zealand iron sand.

As of 2024, the previous *Endura* and *Maxx* grades have been replaced by a single, stronger product — *MAXAM*. One spec, one chip card, suitable from inland alpine sites through to urban coastal builds.

MAXAM is built on *Activate*™ technology — a patented aluminium-zinc-magnesium (AM) metallic coating that significantly slows corrosion. The result is a meaningful step-up in warranty length across every environmental zone NZ Steel publishes.

PERFORATION WARRANTY — UP TO

50 yrs*

Up to 50 years against perforation in Mild environments, up to 20 years in Very Severe Marine, and up to 18 years on paint film. *NZ Steel published exposure zones apply.

WARRANTY BY EXPOSURE ZONE

ZONE	PERFORATION	PAINT FILM
Mild (inland)	up to 50 yr	up to 18 yr
Moderate	up to 36 yr	up to 18 yr
Severe Marine	up to 25 yr	up to 15 yr
Very Severe Marine (<100m to surf)	up to 20 yr	up to 12 yr
Geothermal	up to 25 yr	up to 12 yr

For Extremely Severe environments NZ Steel offers Colorsteel® Altimate® — a heavier-spec alternative we'll quote separately on request.

THE COLOUR RANGE

Standard Colorsteel® palette




Approximate colour rendering — final selection from NZ Steel's physical Colorsteel® chip card.

Marley PVC

Marley is New Zealand's most-installed PVC spouting brand — UV-stabilised, light, doesn't corrode, won't dent in hail. Choice of profile suits both modern and heritage homes. A 15-year *manufacturer's warranty* covers the spouting, downpipes and fittings.

AVAILABLE PROFILES


01



Stormcloud®

Modern square-fronted Stratus Design profile, 125mm × 90mm. The most-installed new-build spouting in NZ.


02



Marley Classic®

Traditional ogee-shouldered profile, 125mm × 80mm. The heritage choice — softens architectural lines on character homes.


03



Typhoon®

High-flow Stratus Design half-round profile, 145mm × 90mm. Engineered for steep roofs and large catchments.

04



Magnum®

Deep Stratus Design rectangular profile — cross-section 14,300mm². Maximum flow rate, commercial-grade.

COLOUR RANGE

Marley palette

White	Black	Karaka	Ironsand	Titanium	Grey Friars®
New Denim Blue®	Permanent Green®	Sandstone Grey®	Pioneer Red®	Lichen®	Slate®


Marley range matches the Colorsteel® colour family. White and Black are universal stock colours; coloured profiles are made-to-order.

Continuous steel

Continuous spouting — also called *seamless* — is rolled on-site from coil-stock Colorsteel® in 0.55bmt steel. No factory joins, far stiffer than PVC, finished in the same colour family as your roof. Made by Roofing Industries for our Northland jobs. A 15-year *paint film warranty* sits on top of the substrate cover.

AVAILABLE PROFILES


01



Continuous Quad

Square-fronted, the New Zealand standard — bold lines, sharp edges.

02



Smoothline

Internal bracketing for a fully concealed look — modern architectural choice.


03



Half Round

Traditional rounded profile — heritage homes, country cottages.


04



Box Gutter

Deep capacity gutter, often used internally / behind parapets on commercial roofs.

05




Colonial Quad


Ogee-shouldered profile — period properties, character villas.

MATCHED TO YOUR ROOF


Colorsteel® colour range




Ironsand®




FlaxPod®




Lignite®




Karakā®




Grey Friars®




Sandstone Grey®




Windsor Grey®



Titania®




New Denim Blue®



Permanent Green®



Mist Green®



Ebony®

— 01

Coastal-grade

AZ150 / AZ200 Galvalloy® substrate stands up to salt spray.

— 02

Stiffer profile

Steel doesn't sag like PVC — long runs without intermediate brackets.

— 03

Matches the roof

Same Colorsteel® colour family — fully coordinated finish.

Scope, timeline & start date

ROOF AREA

148.6

square metres

PITCH

22°

degrees

SHEETS

78


corrugated

ON-SITE

8

days estimated

ROOF PLAN

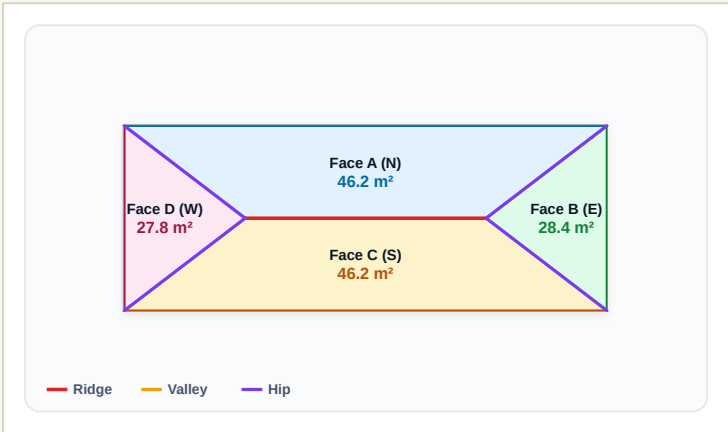

Ridge 7.6 m Hip 16.8 m

SCOPE SUMMARY

- 01 Strip existing corrugated steel roof + dispose to landfill
- 02 Inspect, replace damaged purlins (PC sum allowed)
- 03 Install new Maxam corrugate, all flashings, ridge caps
- 04 Re-flash chimney + 2× plumbing vents
- 05 6m of new spouting on the south elevation

PROJECT TIMELINE · 8 WORKING DAYS ON-SITE

01	Site setup + edge protection		1 day
02	Strip existing roof + dispose		1 day
03	Inspect / replace battens		1 day
04	Install underlay + Maxam		3 days
05	Flashings + new spouting		1 day
06	Final clean + sign-off		1 day

ESTIMATED START DATE

Mid-June 2026 (week of 15 June)

Subject to deposit clearance, materials supply and weather. We confirm the start date in writing once the deposit is paid.

WHAT WE NEED FROM YOU

- 01 Sign & return acceptance page
- 02 Pay 25% deposit — locks in start
- 03 Clear roof access (gardens, vehicles)
- 04 Pick your colour from page 5

Terms & conditions

1. Quote validity

This quote is valid for 30 days from the date issued. After that date materials and labour rates may be re-quoted.

2. Acceptance

The contract is formed when the client signs the acceptance page (or confirms in writing) AND the 25% deposit has cleared into our account. Verbal acceptance does not bind either party.

3. Materials & products

All materials are NZ-made unless explicitly noted. Colorsteel® MAXAM (with Activate™ Technology) carries NZ Steel's manufacturer warranty — up to 50 years against perforation in mild environments, lower in marine zones per NZ Steel's published exposure zones. Marley spouting carries Marley's 15-year warranty. Manufacturer documentation handed over at sign-off.

4. Workmanship warranty

We warrant the workmanship of the installed roof for 10 years from the date of practical completion. This covers fixing, lapping, flashing penetration of weather. It does not cover: damage by other trades, modifications by others, storm or impact damage, or normal wear of paint film (covered separately by manufacturer).

5. Payment terms

25% deposit on acceptance (materials ordered). 50% progress payment due on completion of roof and gutters. 25% final due on practical completion. Invoices payable by the 20th of the month following invoice date. 2.5% per month interest applies to overdue balances. We reserve the right to suspend work for non-payment.

6. Variations & provisional sums

Any change to the agreed scope must be authorised in writing (email is fine). Variations are billed at quoted rates or current trade rates if not pre-quoted. Provisional Cost (PC) items — typically rotten battens or hidden flashings — are charged at cost + 15% on inspection during strip-out.

7. Hidden defects / latent conditions

The quote is based on visible roof condition only. Concealed defects (rotten purlins, asbestos sheeting, structural sag, etc.) discovered during strip-out will be raised with the client immediately, priced, and treated as a variation.

8. Weather & programme

Outdoor roofing work is weather-dependent. Heavy rain or sustained high winds (over 40 km/h) will halt work for safety. We will catch the building up overnight if a strip is incomplete. Re-scheduled days do not attract additional cost unless the client cancels access.

9. Site access & health and safety

Client to provide reasonable site access, water and power. We follow WorkSafe / SiteSafe procedures including edge protection, harness anchors and exclusion zones. Children, pets and visitors must stay out of the active work zone. The client is responsible for moving valuable garden items / parked vehicles clear of the building line.

10. Insurance

We carry \$2 million Public Liability + Contract Works insurance. Sub-trades engaged by us carry their own insurance. Client's building insurance must remain in force during the work.

11. Waste & disposal

All stripped roofing, underlay and packaging is removed from site and disposed of legally. Old metal is recycled where possible. Client may keep salvaged sheets on request, advised before strip-out.

12. Ownership of materials

Title in materials remains with us until paid for in full. Materials installed before payment may be removed at our cost in the event of cancellation, subject to the Construction Contracts Act 2002.

13. Cancellation

Cancellation after deposit but before materials ordered: deposit refunded less a \$250 admin fee. Cancellation after materials are ordered: client pays for all materials ordered + 10% restocking fee where applicable. Cancellation after work has commenced: client pays for all work done to date + materials.

14. Photographs

We typically take before/during/after photographs for our records. We may use anonymised photographs for marketing (website, social media). Tell us in writing if you don't want photos used externally.

15. Dispute resolution

Any dispute will first be raised in writing and we will attempt to resolve it within 14 days. Unresolved disputes go to mediation under the Construction Contracts Act 2002. Disputes governed by New Zealand law, jurisdiction Whangarei District Court.

16. GST

All prices in this quote are exclusive of GST unless explicitly marked "incl. GST". 15% GST is added at invoice. We are GST-registered.

PAYMENT SCHEDULE

25% *Deposit*
Materials ordered

50% *Progress*
Roof & gutters complete

25% *Final*
Practical completion

Acceptance & signature

I, *Smith Residence*, accept the option(s) selected on page 4 and the terms set out in this proposal. Total payable will be confirmed in the variation invoice once option and upgrade selections are finalised.

Client signature

Date · 22 May 2026

FLOOD ROOFING representative

Date

—— *Thank you for the opportunity.* ——