

Ironsand Hip — Tutukaka

Capability statement & quote

— 01 —

A ROOFING PROPOSAL — PREPARED FOR

Smith Residence

14 Pataua South Rd, Whangarei

Roof Replacement — Smith Residence, Pataua South

REFERENCE

FR-2026-051

PREPARED

22 May 2026

VALID

30 days

About FLOOD ROOFING

Flood Roofing is the well-trusted name in Northland — providing high-quality, efficient roofing since 2016. We work right across Whangarei, Kerikeri and the Bay of Islands, from straightforward residential re-roofs through to large-scale commercial work and pole sheds up to 1,000m².

All of our lead roofers are trade-qualified Licensed Building Practitioners (LBP), and our younger crew work alongside them as apprentices. We fit genuine NZ-made Colorsteel® MAXAM as standard, and back our workmanship with a written 10-year warranty.

100% price guarantee — the price we quote is the price you pay. No hidden extras and no separate scaffolding quote, because we do our own edge-protection scaffolding in-house.

"We treat every roof like it's our own home — premium materials, no shortcuts, and we stand behind the work for a decade."

— FLOOD ROOFING

— 01

Trade-qualified & LBP

All lead roofers are trade-qualified Licensed Building Practitioners. Apprentices work alongside them.

— 02

100% price guarantee

The price we quote is the price you pay. No hidden extras, scaffolding included — we do our own.

— 03

Genuine NZ Colorsteel

Maxam, ColorZen and Zinc-Aluminium — all NZ-made, backed by manufacturer warranty.

— 04

Northland-based since 2016

The well-trusted name in Whangarei, Kerikeri and the Bay of Islands. Ask around.

THE TEAM

Who'll be on your roof

01.

Owner / Project Lead

Aron Flood

Quoting, site supervision, sign-off

02.

Lead Roofer

Sam Whittaker

On-site lead, installation, QC

03.

Roofers (×2)

Jase + Mason

Strip-out + install crew

04.

Apprentice

Tane Mahuta

Materials handling, supervised work

Existing roof condition

The existing roof is original ~1995 Colorsteel corrugate showing significant paint film failure on the north and west faces, with rust beginning at fixing points. Ridge cap is flat-bar fixed (now superseded) and has lifted in three places on the western run. Spouting on the south elevation is sagging and undersized for the catchment. We recommend a full strip-and-replace rather than overcoat — the underlying steel has begun to perforate in isolated areas.

OBSERVATIONS

- 01

Paint film failure 60-70% on north + west faces (chalk + flake)
- 02

Surface rust at all fixing points, perforation starting at 4 fixings
- 03

Ridge cap lifted in 3 locations — flat-bar fixings outdated
- 04

Underlay has degraded (visible from inside ceiling space)
- 05

6m of south-elevation spouting sagging; downpipe undersized
- 06

No identified asbestos products in the existing roof structure

SITE DOCUMENTATION

Site overview

Site overview

Existing ridge cap

Existing ridge cap — flat-bar fixings

— photo —

UPLOAD SITE PHOTO HERE

— photo —

UPLOAD SITE PHOTO HERE

— photo —

UPLOAD SITE PHOTO HERE

— photo —

UPLOAD SITE PHOTO HERE

Quote inclusions & pricing

A.

OPTION A

Main House Re-Roof — Colorsteel® MAXAM

This estimate is for the Re-Roof to the main house roof of approx. 148m² (roof area). Standard 0.40g Colorsteel® MAXAM in Corrugated profile, with a 50-year warranty in Mild environments.

INCLUDES THE FOLLOWING WORK

- Erect edge-protection scaffolding
- Supply & install new 70×45 H1 purlins to support the new roofing
- Supply & install synthetic self-support underlay
- Supply & install new Colorsteel® MAXAM (50-yr warranty in Mild environment) standard 0.40g in Corrugated profile
- Supply & install all associated flashings
- Leave site clean and tidy

ITEMISED PRICING

DESCRIPTION	QTY	UNIT	TOTAL
Colorsteel® MAXAM corrugate (0.40g)	148	\$78.50	\$11,618.00
MAXAM ridge, apron & barge flashings	32	\$42.00	\$1,344.00
70×45 H1 purlins + fixings	1	\$1,480.00	\$1,480.00
Synthetic self-support underlay	1	\$980.00	\$980.00
Penetrations + chimney flashing kit	3	\$285.00	\$855.00
Labour — strip, install, sign-off	1	\$7,800.00	\$7,800.00
Skip hire + disposal	1	\$480.00	\$480.00

SECTION TOTAL — INCL. GST

\$28,240.55

Sub \$24,557.00 · GST \$3,683.55

UPGRADE / DOWNGRADE OPTIONS

Downgrade to Zinc-Aluminium (plain silver, 20-yr warranty) Commercial-grade plain silver Zinalume. Dramatically lower cost, no painting required.	−\$1,943.50
Downgrade to Armorsteel ColorZen (30-yr warranty, mild) Cheaper Colorsteel alternative, good colour range, 30-year warranty in mild environments.	−\$1,046.50
Upgrade to thicker gauge 0.55g Colorsteel® MAXAM Same warranty as 0.40g, thicker sheet — better hail resistance and acoustic dampening.	+\$1,127.00
Replace gutters with Colorsteel® 125mm Box Gutter Step up from PVC to coil-rolled Colorsteel — much higher flow capacity, matched to roof.	+\$3,967.50

B.

OPTION B

Garage Re-Roof — Colorsteel® MAXAM

This estimate section is for the Re-Roof to the Garage roof of approx. 35m² (roof area). Standard 0.40g Colorsteel® MAXAM in Corrugated profile, with the same 50-year warranty as the main house.

INCLUDES THE FOLLOWING WORK

- Erect edge-protection scaffolding
- Supply & install new 70×45 H1 purlins to support the new roofing
- Supply & install synthetic self-support underlay
- Supply & install new Colorsteel® MAXAM (50-yr warranty in Mild environment) standard 0.40g in Corrugated profile
- Supply & install all associated flashings
- Leave site clean and tidy

ITEMISED PRICING

DESCRIPTION	QTY	UNIT	TOTAL
Colorsteel® MAXAM corrugate (0.40g)	35	\$78.50	\$2,747.50
MAXAM ridge & barge flashings	12	\$42.00	\$504.00
70×45 H1 purlins + fixings	1	\$480.00	\$480.00
Synthetic self-support underlay	1	\$280.00	\$280.00
Labour — strip, install, sign-off	1	\$2,000.00	\$2,000.00
Skip hire + disposal	1	\$240.00	\$240.00

SECTION TOTAL — INCL. GST \$7,189.23
Sub \$6,251.50 · GST \$937.72

UPGRADE / DOWNGRADE OPTIONS

Downgrade to Zinc-Aluminium (plain silver, 20-yr warranty) As main house downgrade, applied to garage scope.	-\$621.00
Downgrade to Armorsteel ColorZen (30-yr warranty, mild) As main house downgrade, applied to garage scope.	-\$333.50
Upgrade to thicker gauge 0.55g Colorsteel® MAXAM As main house upgrade, applied to garage scope.	+\$391.00
Replace gutters with Colorsteel® 125mm Box Gutter As main house upgrade, applied to garage scope.	+\$2,185.00

Colorsteel® MAXAM & alternatives

Flood Roofing uses *Colorsteel® MAXAM* as standard — NZ Steel's newest pre-painted roofing product, rolled and painted at Glenbrook from New Zealand iron sand. MAXAM is built on *Activate™* technology, a patented aluminium-zinc-magnesium coating that meaningfully slows corrosion.

For tighter budgets we also fit two alternatives at a lower price point — *Armorsteel ColorZen* (30-yr warranty, mild environments) and plain-silver *Zinc-Aluminium* (20-yr non-perforation). Detail and cost of each downgrade is shown on your pricing page.

MAXAM PERFORATION — UP TO

50 yrs*

Up to 50 years in Mild environments (more than 5km from breaking surf). *NZ Steel exposure zones apply — see table below.

COLORSTEEL MAXAM WARRANTY — BY DISTANCE TO BREAKING SURF

ZONE	DISTANCE FROM SURF	PERFORATION
<i>Mild</i>	5 km +	50 yr
<i>Moderate</i>	500 m – 1,000 m	40 yr
<i>Severe</i>	100 m – 500 m	30 yr
<i>Very Severe</i>	25 m – 100 m	20 yr

THREE PRODUCT TIERS

— Premium

Colorsteel® MAXAM

up to 50 yr warranty

NZ Steel's latest. *Activate™* aluminium-zinc-magnesium coating. What we install as standard.

— Mid-range

Armorsteel ColorZen

30 yr (mild) warranty

A cheaper Colorsteel alternative. Solid warranty, good colour range, less corrosion protection in coastal zones.

— Budget

Zinc-Aluminium (silver)

20 yr warranty

Plain silver Zinalume. Commercial-grade. Dramatically lower cost. Painting in 20–25 years prolongs life.

THE COLOUR RANGE

Standard Colorsteel® palette

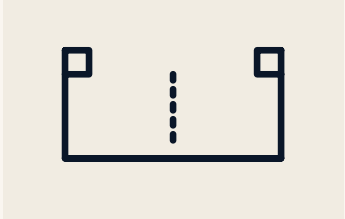
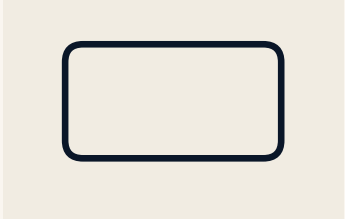
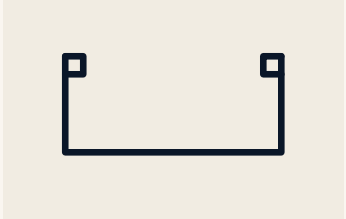
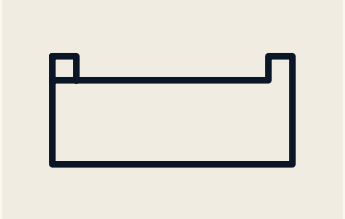
Ironsand®	FlaxPod®	Lignite®	Karaka®	Grey Friars®	Sandstone Grey®
Windsor Grey®	Titania®	New Denim Blue®	Permanent Green®	Mist Green®	Ebony®

Approximate colour rendering — final selection from NZ Steel's physical Colorsteel® chip card.

Marley Typhoon® PVC

Marley is New Zealand's most-installed PVC spouting brand — UV-stabilised, light, doesn't corrode and won't dent in hail. *Typhoon* is what we fit as standard: a high-flow half-round profile, far superior to the older Marley Classic for our catchments. For larger roofs or extra peace of mind we recommend the upgrade to *Colorsteel® 125mm Box Gutter* — page 07. A 15-year manufacturer's warranty covers the spouting, downpipes and fittings.

AVAILABLE PROFILES

01 STANDARD	02	03	04
			
Marley Typhoon® Our standard fit. High-flow half-round profile, 145mm × 90mm. Far superior to Classic — bigger capacity, better drainage for NZ rainfall.	Marley Classic® Traditional ogee-shouldered profile, 125mm × 80mm. The heritage choice — softens architectural lines on character homes.	Stormcloud® Modern square-fronted Stratus Design profile, 125mm × 90mm. Sharp contemporary look for new builds.	Marley Magnum® Deep rectangular profile — cross-section 14,300mm². Maximum flow rate, commercial-grade.

COLOUR RANGE

Marley palette

White	Black	Karaka	Ironsand	Titanium	Grey Friars®
New Denim Blue®	Permanent Green®	Sandstone Grey®	Pioneer Red®	Lichen®	Slate®

Marley range matches the Colorsteel® colour family. White and Black are universal stock colours; coloured profiles are made-to-order.

Colorsteel® 125mm Box Gutter

For larger roofs, or for added peace of mind on Northland's heavy rainfall events, we recommend stepping up from Marley Typhoon to a continuous *Colorsteel® 125mm Box Gutter* — rolled on-site in 0.55bmt steel, no factory joins, much higher flow capacity than any PVC profile. Finished in the same Colorsteel colour family as your roof for a fully coordinated finish, with a *15-year paint film warranty* on top of the substrate cover.

AVAILABLE PROFILES

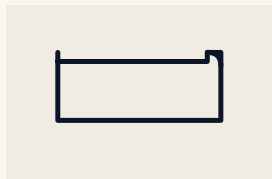
01



Continuous Quad

Square-fronted, the New Zealand standard — bold lines, sharp edges.

02



Smoothline

Internal bracketing for a fully concealed look — modern architectural choice.

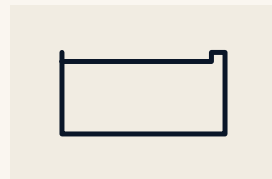
03



Half Round

Traditional rounded profile — heritage homes, country cottages.

04



Box Gutter

Deep capacity gutter, often used internally / behind parapets on commercial roofs.

05











Colonial Quad

Ogee-shouldered profile — period properties, character villas.

MATCHED TO YOUR ROOF

Colorsteel® colour range

 Ironsand®	 FlaxPod®	 Lignite®	 Karakā®	 Grey Friars®	 Sandstone Grey®
 Windsor Grey®	 Titania®	 New Denim Blue®	 Permanent Green®	 Mist Green®	 Ebony®

— 01

Coastal-grade

AZ150 / AZ200 Galvalloy® substrate stands up to salt spray.

— 02

Stiffer profile

Steel doesn't sag like PVC — long runs without intermediate brackets.

— 03

Matches the roof

Same Colorsteel® colour family — fully coordinated finish.

Scope, timeline & start date

ROOF AREA

148.6

square metres

PITCH

22°

degrees

SHEETS

78

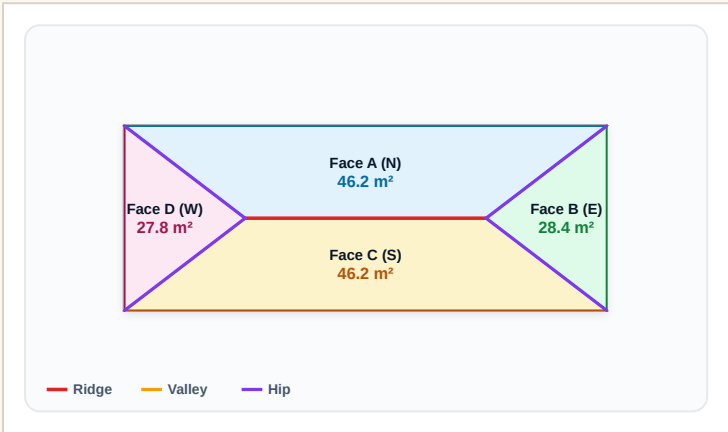
corrugated

ON-SITE

8

days estimated

ROOF PLAN



Ridge 7.6 m Hip 16.8 m

SCOPE SUMMARY

- 01 Strip existing corrugated steel roof + dispose to landfill
- 02 Inspect, replace damaged purlins (PC sum allowed)
- 03 Install new Maxam corrugate, all flashings, ridge caps
- 04 Re-flash chimney + 2× plumbing vents
- 05 6m of new spouting on the south elevation

PROJECT TIMELINE · 8 WORKING DAYS ON-SITE

01	Site setup + edge protection		1 day
02	Strip existing roof + dispose		1 day
03	Inspect / replace battens		1 day
04	Install underlay + Maxam		3 days
05	Flashings + new spouting		1 day
06	Final clean + sign-off		1 day

ESTIMATED START DATE

Mid-June 2026 (week of 15 June)

Subject to deposit clearance, materials supply and weather. We confirm the start date in writing once the deposit is paid.

WHAT WE NEED FROM YOU

- 01 Sign & return acceptance page
- 02 Pay 50% deposit — locks in start (invoiced ~7 days before)
- 03 Clear roof access (gardens, vehicles)
- 04 Pick your colour from page 5

Terms & conditions

1. Quote validity

This quote is valid for 21 days from the date issued. After that date materials and labour rates may be re-quoted.

2. 100% price guarantee

The price we quote is the price you pay. No hidden extras — and no separate scaffolding quote, because we do our own edge-protection scaffolding in-house.

3. Acceptance

The contract is formed when the client signs the acceptance page (or confirms in writing) AND the 50% deposit has cleared into our account. Verbal acceptance does not bind either party.

4. Materials & products

All materials are NZ-made unless explicitly noted. Colorsteel® MAXAM (with Activate™ Technology) carries NZ Steel's manufacturer warranty — up to 50 years against perforation in Mild environments (5km+ from breaking surf), reducing in Marine zones per NZ Steel's published exposure zones. Marley Typhoon spouting carries Marley's 15-year warranty. Manufacturer documentation handed over at sign-off.

5. Workmanship warranty

We warrant the workmanship of the installed roof for 10 years from the date of practical completion. This covers fixing, lapping, flashing penetration of weather. It does not cover: damage by other trades, modifications by others, storm or impact damage, or normal wear of paint film (covered separately by manufacturer).

6. Payment terms

50% deposit invoice sent approximately 7 days before commencement of work — work is scheduled once the deposit clears. 50% final payment due within 7 days of practical completion. Invoices payable by the 20th of the month following invoice date. 2.5% per month interest applies to overdue balances. We reserve the right to suspend work for non-payment.

7. Variations & provisional sums

Any change to the agreed scope must be authorised in writing (email is fine). Variations are billed at quoted rates or current trade rates if not pre-quoted. Provisional Cost (PC) items — typically rotten battens or hidden flashings — are charged at cost + 15% on inspection during strip-out.

8. Hidden defects / latent conditions

The quote is based on visible roof condition only. Concealed defects (rotten purlins, asbestos sheeting, structural sag, etc.) discovered during strip-out will be raised with the client immediately, priced, and treated as a variation.

9. Lead time & programme

Average lead time from acceptance to start is 5–8 weeks, scheduled first-in first-served. Outdoor work is weather-dependent — heavy rain or sustained high winds (40+ km/h) will halt work for safety. We catch the building up overnight if a strip is incomplete. Re-scheduled days do not attract additional cost unless the client cancels access.

10. Site access & health and safety

Client to provide reasonable site access, water and power. We follow WorkSafe / SiteSafe procedures including edge protection, harness anchors and exclusion zones. Children, pets and visitors must stay out of the active work zone. The client is responsible for moving valuable garden items / parked vehicles clear of the building line.

11. Insurance

We carry \$2 million Public Liability + Contract Works insurance. Sub-trades engaged by us carry their own insurance. Client's building insurance must remain in force during the work.

12. Waste & disposal

All stripped roofing, underlay and packaging is removed from site and disposed of legally. Old metal is recycled where possible. Client may keep salvaged sheets on request, advised before strip-out.

13. Ownership of materials

Title in materials remains with us until paid for in full. Materials installed before payment may be removed at our cost in the event of cancellation, subject to the Construction Contracts Act 2002.

14. Cancellation

Cancellation after deposit but before materials ordered: deposit refunded less a \$250 admin fee. Cancellation after materials are ordered: client pays for all materials ordered + 10% restocking fee where applicable. Cancellation after work has commenced: client pays for all work done to date + materials.

15. Photographs

We typically take before/during/after photographs for our records. We may use anonymised photographs for marketing (website, social media). Tell us in writing if you don't want photos used externally.

16. Dispute resolution

Any dispute will first be raised in writing and we will attempt to resolve it within 14 days. Unresolved disputes go to mediation under the Construction Contracts Act 2002. Disputes governed by New Zealand law, jurisdiction Whangarei District Court.

17. GST

All prices in this quote are exclusive of GST unless explicitly marked "incl. GST". 15% GST is added at invoice. We are GST-registered.

Acceptance & signature

I, *Smith Residence*, accept the option(s) selected on page 4 and the terms set out in this proposal. Total payable will be confirmed in the variation invoice once option and upgrade selections are finalised.

Client signature

Date · 22 May 2026

FLOOD ROOFING representative

Date

—— *Thank you for the opportunity.* ——